




Electric pedestrian pallet truck **EJE 114i / 116i / 118i**

Lift height: 122 mm / Load capacity: 1400-1800 kg

EJE 114i / 116i / 118i

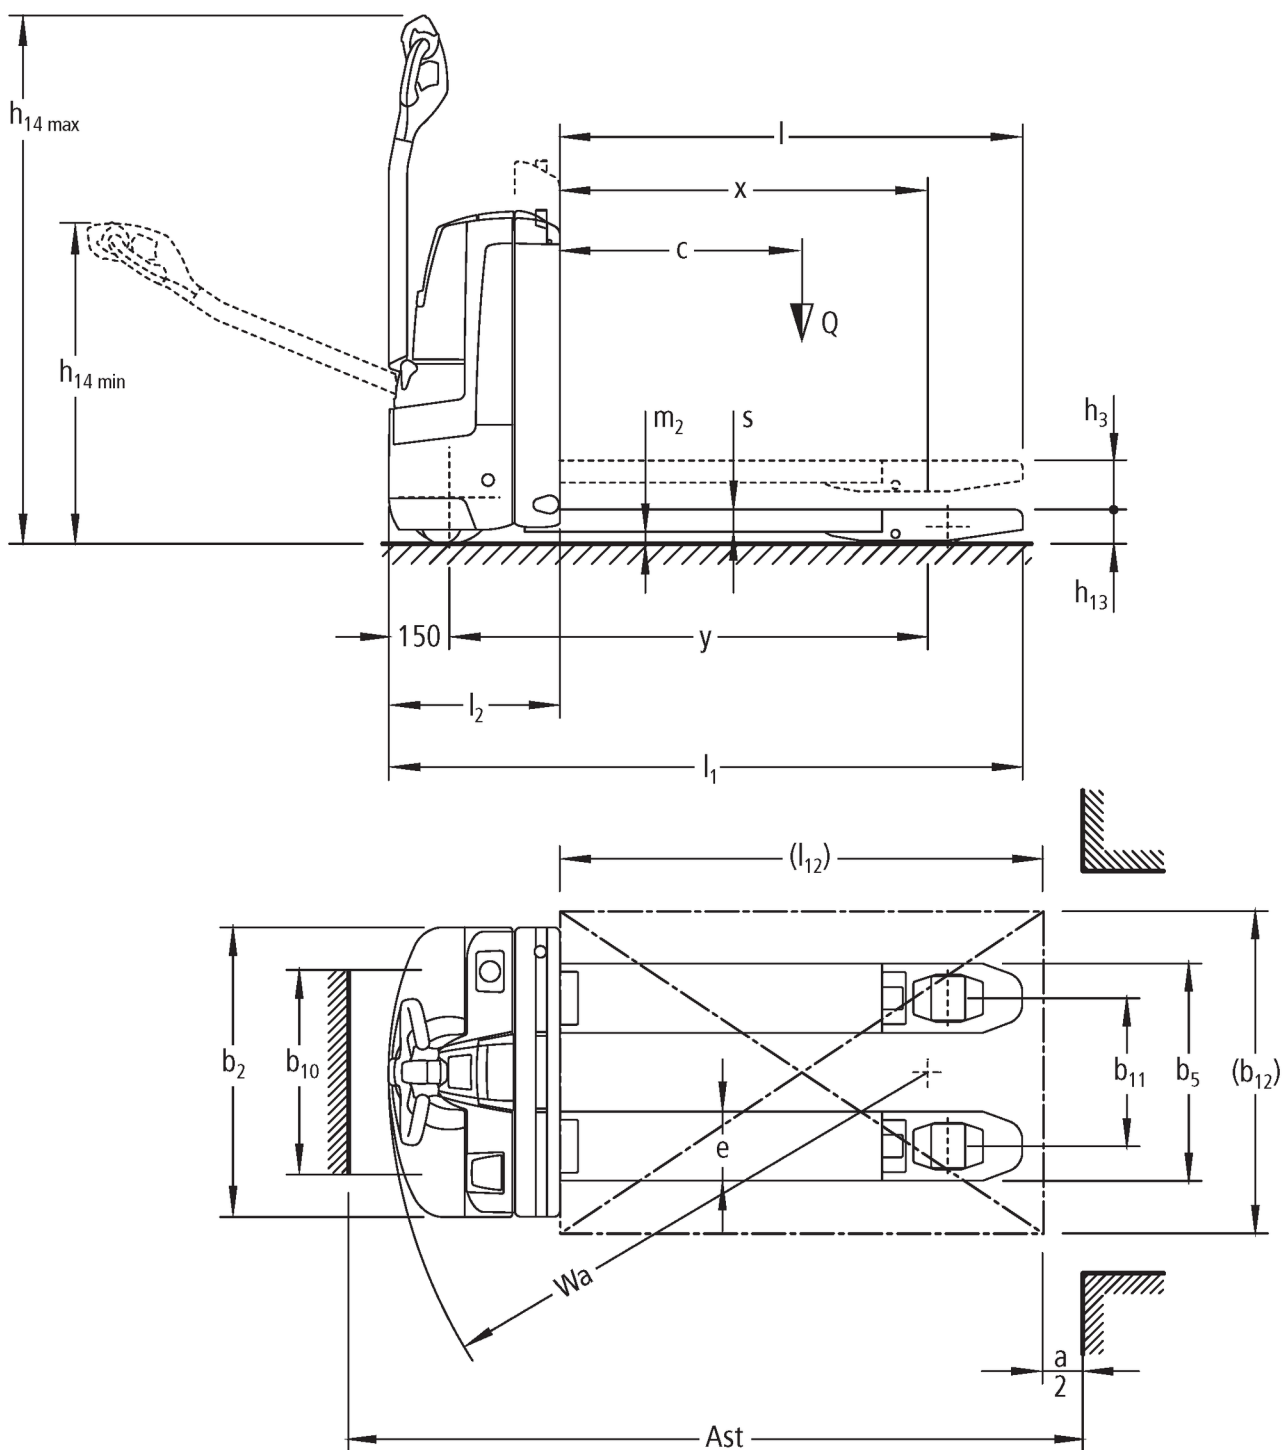

VDI table

Stand-on: 11/2021

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich		
	1.2	Manufacturer's type designation		EJE 114i	EJE 116i	EJE 118i
	1.3	Drive		Electric		
	1.4	Operation		Pedestrian		
	1.5	Load capacity/load	Q kg	1400	1600	1800
	1.6	Load centre distance	c mm	600		
	1.8	Load distance, centre of drive axle to fork	x mm	908		
	1.9	Wheelbase	y mm	1182		
Weights	2.1.1	Service weight (incl. battery)		kg	280	
	2.2	Axle load laden front/rear		kg	560 / 1120	600 / 1280 660 / 1420
	2.3	Axle load unladen front/rear		kg	220 / 60	
Wheels/suspension system	3.1	Tyres		Polyurethane (PU)		
	3.2	Tyre size, front		Ø 230 x 70		
	3.3	Tyre size, rear		Ø 80 x 90 / 80 x 70 / 80 x 35		
	3.4	Additional wheels		Ø 100 x 40		
	3.5	Wheels, number front/back (x=driven)		1x +2/2 oder 4		
	3.6	Tread width, front	b ₁₀ mm	510		
	3.7	Tread width, rear	b ₁₁ mm	363		
Basic dimensions	4.4	Lift (h ₃)	h ₃ mm	122		
	4.9	Height of tiller handle in drive position min./max.		mm	750 / 1237	
	4.15	Height, lowered	h ₁₃ mm	85		
	4.19	Overall length	l ₁ mm	1566		
	4.20	Length including fork shank	l ₂ mm	416		
	4.21.1	Overall width	b ₁ mm	720		
	4.22	Fork dimensions	s/e/l mm	55 x 150 x 1150		
	4.25	Width across forks	b ₅ mm	513		
	4.32	Ground clearance centre of wheelbase	m ₂ mm	30		
	4.34	Aisle width (pallet 1000x1200 sideways)	A _{st} mm	2170		
	4.34.1	Aisle width (pallet 800x1200 length)	A _{st} mm	2058		
	4.35	Turning radius	W _a mm	1363		
Performance data	5.1	Travel speed laden/unladen		km/h	5 / 5	6 / 6
	5.2	Lift speed laden/unladen		m/s	0.03 / 0.03	0.04 / 0.04
	5.3	Lowering speed laden/unladen		m/s	0.05 / 0.04	
	5.8	Max. gradeability laden/unladen		%	8 / 20	6 / 20
	5.10	Service brake			generative	
E-motor/Electronics	6.1	Drive motor, performance S2 60 min		kW	0.9	1.1
	6.2	Lift motor, performance with S3		kW	1.2	
	6.3	Battery according to DIN 43531/35/36			B	
	6.4	Battery voltage/nominal capacity		V / Ah	25.7 / 40	
	6.5	Battery weight		kg	15	
	6.6.1	Energy consumption according to EN cycle		kWh/h	0.32	0.31 0.29
	6.6.2	CO2 equivalent as per EN 16796		kg/h	0.2	
	6.7	Throughput		t/h	67	93 110
	6.8.1	Energy consumption with max. throughput		kWh/h	0.49	0.66 0.59

Other	8.1	Type of drive control		AC
	10.7	Sound level as per EN12053, operator's ear	dB (A)	61
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.				

The German production facilities in
Norderstedt, Moosburg and Landsberg
are certified.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet
European safety requirements.



 **JUNGHEINRICH**